




UFH4083
UFH4085

LINK AMERICAN CABLING


Scope of Application

LINK FDU DOUBLE-Q SLIDE Rack Mount provides a centralized point for termination, splice, storage and distribution of optical fibers, which are middle capacity both side operation, it is suitable for central offices connection points, data centers, local area network etc. It is an ideal solution for rack or cabinet mounting in compact areas. This unit provides excellent fiber patching management.


Drawing

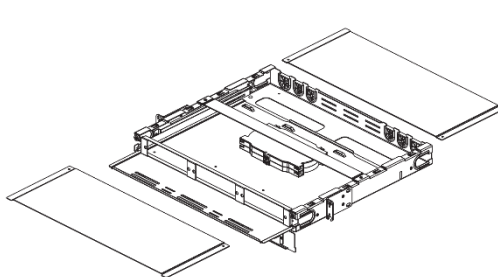

UFH4083

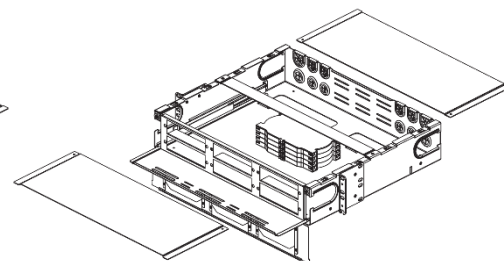

UFH4085

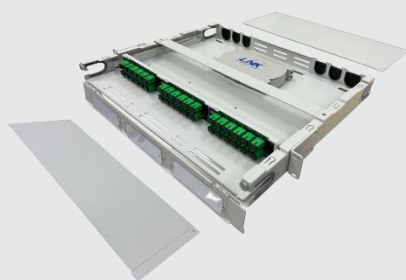

FEATURES

- Removable front and back side -top cover is not tools required for easier operations.
- Supported cable termination, splicing and distribution.
- Easy to install with 19" Rack Mounting.
- Easy operations: Slide type.
- Fully stable patch panel, no risk of movement.
- The front panel has space and able wire guide for organizing patch cords.
- Protected patch panel offers secure environment for adapters, patch cords and pigtailed.
- Front panel quipped with magnetic lock system that can be easily open and close.
- Adapter Panel adopted for easy operation.
- Cable fixing units provided.
- Suitable for all of LINK adapter snap plate such as ST, SC, FC and LC Adapter Snap Plate.
- The laser symbol and LINK trademark are clearly screened at the front.
- Including front label & 24F splice tray.
- UFH4083 the back side provide 6 cable entry ports and UFH4085 the back side provide 12 cable entry ports.
- The side panel provide 2 oval slot cable entry.





SPECIFICATIONS

Part Number	Capacity	Rack Unit (U)	No.of 24F Splice Tray	Capacity Snap –In Plate	In/Out Cable port	Dimension (mm) Depth
UF-4083	12-36 Cores	1U	2	3	8	482.6X380.4X44
UF-4085	12-72 Cores	2U	4	6	14	482.6X380.6X87.3

Material:	Body	- Aluminum light weight, thickness 1.2 mm.
	Inner Plate	- Aluminum light weight thickness 1.0 mm.
	Mounting Brackets	- Aluminum light weight thickness 1.5 mm.

ACCESSORIES

- Splice Tray 24F
- Cable tie
- Screw and Nut
- Labeling paper
- Cable Gland
- Self – Adhesive twist lock

ORDER INFORMATION

Part Number	Descriptions	Capacity	Color
UF-4083	FDU DOUBLE - Q SLIDE 12- 36F, w/ Splice Tray, Unload (1U)	36F	Light Gray
UF-4085	FDU DOUBLE - Q SLIDE 12- 72F, w/ Splice Tray, Unload (2U)	72F	Light Gray

*Note : All model without pigtail and adapter

Specifications subject to change without notice.

© 2026 LINK CORP. ALL RIGHTS RESERVED

www.linkcable.com

UFH408X-V1.0__150126