




UFC92XXLSZH
UFC52XXLSZH
UFC42XX
UFC32XX
UFC22XX

Scope of Application

This specification covers the general requirements for fiber optic telecommunication cables used for campus backbone (inter-building), building backbone (intra-building), indoor installation. LINK fiber optic cable support application such as 40/100Gbps Ethernet, IEEE802.3ae, 10G Ethernet, IEEE802.3z, Gigabit Ethernet, Fast Ethernet, Ethernet, 100BASE-F, 52/155/622Mbps and 1.2Gbps ATM, FDDI, Fiber channel and others.

LINK INDOOR, Distribution, LSZH, fiber optic cable, 900µm tight-buffered optical fibers surrounded by aramid strength member with a flame-retardant LSZH outer jacket.

Drawing

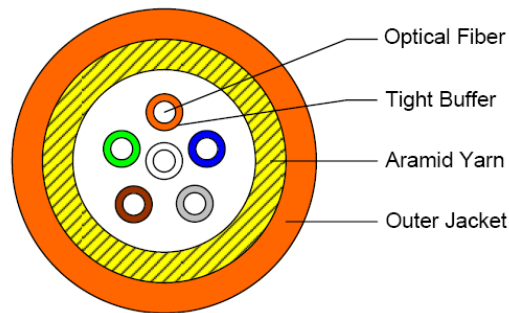

Technical Standard

- | | |
|------------------------------------|------------------------------------|
| • ANSI/TIA-568.3-D | ISO/IEC 11801:2011 |
| • ANSI/TIA-568-B.3 | ISO/IEC 11801:2017 |
| • ANSI/ICEA 596 | IEC 60332-1, IEC 60332-3 |
| • Telcordia (Bellcore) GR-409-CORE | IEC 61034-2, IEC 60754-2 |
| • ITU-T G.652D (Singlemode) | IEC 60793, IEC 60794-1-2 |
| • ITU-T G.651 (Multimode) | EN 50173-1, UL-1666, FR-LSZH, OFNR |
| • RoHS Compliant | |





OPTICAL FIBER

Items		Specifications
Fiber Type		9/125 μm (OS2)
Max. / Typ. Attenuation	1310 nm	$\leq 0.35/0.33$ dB/km
	1383 nm	$\leq 0.35/0.31$ dB/km
	1550 nm	$\leq 0.21/0.19$ dB/km
	1625 nm	$\leq 0.23/0.20$ dB/km
Core	Mode Field Diameter	9.2 $\pm$ 0.4 μm @ 1310 nm 10.4 $\pm$ 0.5 μm @ 1550 nm
Cladding Diameter		125 $\pm$ 0.7 μm
Coating Diameter, Primary		242 $\pm$ 5 μm
Coating Diameter, Secondary		250 $\pm$ 5 μm
Cladding Non-circularity		≤ 0.7 %
Core/Cladding Concentricity error		≤ 0.5 μm
Coating/Cladding Concentricity error		≤ 12 μm
Attenuation (Homogeneity)		Max 0.1 dB/km
Zero Dispersion Wavelength		1300 ~ 1324 nm
Zero Dispersion Slope		≤ 0.092 ps/(nm ² .km)
Cut-off Wavelength	λ_o (Fiber)	1150 ~ 1330 nm
	λ_∞ (Cable)	≤ 1260 nm
Proof Test Stress		100 Kpsi
Chromatic Dispersion	λ ; 1285~1340 nm	≤ 3.5 ps/nm.km
	$\lambda = 1550$ nm	≤ 18 ps/nm.km
	$\lambda = 1625$ nm	≤ 22 ps/nm.km
Polarization mode dispersion (PMD)		≤ 0.20 ps/ $\sqrt{\text{km}}$
Fiber Curl		$\geq 4\text{M}$
Numerical Aperture		0.130 $\pm$ 0.010
Group refractive index	1310 nm	1.4676
	1550 nm	1.4682

Table 1 The Optical, Geometrical Performance of the Singlemode Fiber (The specification conforms to the requirement of ISO/IEC11801, ANSI/TIA-568.3-D, IEC 60793-2B1.3, ITU-T G.652D)



OPTICAL FIBER

Items		Specifications			
Fiber Type		50/125 μ m (OM2)	50/125 μ m (OM3)	50/125 μ m (OM4)	50/125 μ m (OM5)
Max./ Typ. Attenuation (dB/km)	850 nm	$\leq 2.7 / \leq 2.5$	$\leq 2.7 / \leq 2.3$	$\leq 2.7 / \leq 2.3$	$\leq 2.7 / \leq 2.3$
	1300 nm	$\leq 0.8 / \leq 0.7$	$\leq 0.8 / \leq 0.6$	$\leq 0.8 / \leq 0.6$	$\leq 0.8 / \leq 0.6$
	953 nm	N.A	N.A	N.A	$\leq 2.3 / \leq 2.0$
Bandwidth (MHz/km)	850 nm	≥ 500	≥ 1500	≥ 3500	≥ 3500
	1300 nm	≥ 500	≥ 500	≥ 500	≥ 500
	953 nm	N.A	N.A	N.A	≥ 1850
850nm Laser Bandwidth (MHz/km)		N.A	≥ 2000	≥ 4700	≥ 4700
953nm Laser Bandwidth (MHz/km)		N.A	N.A	N.A	≥ 2470
Core Diameter (μ m)		50.0 ± 2.5	50.0 ± 2.5	50.0 ± 2.5	50.0 ± 2.5
Cladding Diameter (μ m)		125 ± 1	125 ± 1	125 ± 1	125 ± 1
Core Non-circularity (%)		≤ 5	≤ 5	≤ 5	≤ 5
Cladding Non-circularity (%)		≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
Core/Cladding Concentricity error (μ m)		≤ 1.5	≤ 1.5	≤ 1.5	≤ 1.5
Coating Diameter, Primary (μ m)		242 ± 5	242 ± 5	242 ± 5	242 ± 5
Coating Diameter, Secondary (μ m)		250 ± 5	250 ± 5	250 ± 5	250 ± 5
Coating Non-Circularity (%)		≤ 5	≤ 5	≤ 5	≤ 5
Coating/Cladding Concentricity error (μ m)		≤ 12	≤ 12	≤ 12	≤ 12
Attenuation (Homogeneity)		Max 0.1 dB/km	Max 0.1 dB/km	Max 0.1 dB/km	Max 0.1 dB/km
Proof Test Stress (kpsi)		100	100	100	100
Bending Loss @ 850 & 1300 nm (100 turns,		≤ 0.5 dB	≤ 0.5 dB	≤ 0.5 dB	≤ 0.5 dB
Zero-Dispersion Wavelength		1295~1315nm	1295~1315nm	1295~1315nm	1295~1315nm
Zero-Dispersion Slope (ps/(nm ² .km))		≤ 0.101	≤ 0.101	≤ 0.101	≤ 0.101
Numerical Aperture		0.200 ± 0.015	0.200 ± 0.015	0.200 ± 0.015	0.200 ± 0.015
Group refractive index	850 nm	1.482	1.482	1.482	1.482
	1300 nm	1.477	1.477	1.477	1.477

Table 2 The optical, Geometrical Performance of the Multimode Fiber (The specification conforms to the requirement of ISO/IEC11801, ANSI/TIA-568.3-D, IEC 60793-2A1a, IEC 60793-2A1b, ITU -T G.651)



CABLE CONSTRUCTION

The construction of the cable shall be in accordance with Table 3 below.

Items		Specifications			
Number of fiber		4 Core	6 Core	8 Core	12 Core
Tight Buffer	Material	FR-PVC with color coding			
	Outer Diameter	900 μ m			
Strength Member		Aramid Yarn			
Outer Jacket	Material	FR-LSZH			
Cable Diameter (Approx.)		4.8 $\pm$ 0.2 mm	5.4 $\pm$ 0.2 mm	5.9 $\pm$ 0.2 mm	6.8 $\pm$ 0.2 mm
Cable Weight (Approx.)		21 kg/km	26 kg/km	33 kg/km	42 kg/km

Table 3 Construction of INDOOR, DISTRIBUTION, LSZH, FIBER OPTIC CABLE.

TEMPERATURE RANGE

For the cables covered by this specification, the following temperature ranges apply.

- Operation Temperature : -40°C to +80°C
- Installation Temperature : -40°C to +80°C
- Storage/Shipping Temperature : -40°C to +85°C

MECHANICAL SPECIFICATION

Item		Specification			
Number of fibers		4 Core	6 Core	8 Core	12 Core
Maximum Tensile load	Installation	600N	600N	600N	600N
	Operation	300N	300N	300N	300N
Minimum bending Radius	Installation	15x	15x	15x	15x
	Operation	10x	10x	10x	10x

Table 4 Mechanical Specification of the cable.



MECHANICAL PERFORMANCE TEST

- Tensile loading Test TIA/EIA-455-33A and IEC 60794-1-2-E1A
- Compression Test TIA/EIA-455-41A and IEC 60794-1-2-E3
- Repeated Bending Test TIA/EIA-455-104A and IEC 60794-1-2-E6
- Impact Test TIA/EIA-455-25B and IEC 60794-1-2-E4
- Cable Bending Test IEC 60794-1-2-E11B
- Cable Twist or Torsion Test TIA/EIA-455-85A and IEC 60794-1-2-E7
- Temperature Cycling Test TIA/EIA-455-3A and IEC 60794-1-2-F1
- Water Penetration Test TIA/EIA-455-82B and IEC 60794-1-2-F5

ORDER INFORMATION

INDOOR, DISTRIBUTION, FR-LSZH, FIBER OPTIC CABLE

Descriptions	OS2, SM 9/125 μm	OM2, MM 50/125 μm	OM3, MM 50/125 μm	OM4, MM 50/125 μm	OM5, MM 50/125 μm
4 Core	UFC9204LSZH	UFC5204LSZH	UFC4204	UFC3204	UFC2204
6 Core	UFC9206LSZH	UFC5206LSZH	UFC4206	UFC3206	UFC2206
8 Core	UFC9208LSZH	UFC5208LSZH	UFC4208	UFC3208	UFC2208
12 Core	UFC9212LSZH	UFC5212LSZH	UFC4212	UFC3212	UFC2212

Specifications subject to change without notice.

© 2025 LINK CORP. ALL RIGHTS RESERVED

www.linkcable.com

UFCX2XX-V1.4__240725