




UF-2255SM-APC

### Scope of Application

LINK adapter snap plates designed for convenient use with Fiber Optic Distribution Unit (FDU), rack mount drawer and wall mount enclosures. Provide nylon rivet (snap on) access easy to install and update. LINK adapter snap plate wide variety of singlemode and multimode plate options: ST, SC, FC, LC, MT-RJ and E2000., Premises installation, Data center, Telecommunication network, Ethernet, LAN and Fiber Optic Distribution Panel

### Drawing

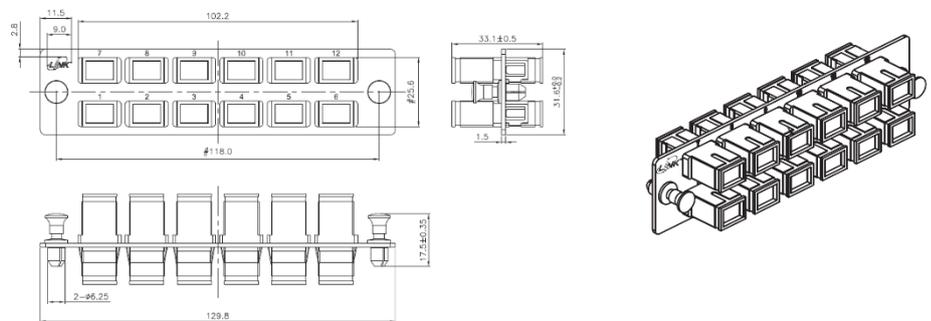

12 SC SIMPLEX ADAPTER SNAP PLATE

### FEATURES AND BENEFITS

- Suitable for all LINK FDU.
- Provides 12 ports for SC adapter.
- Low insertion loss.
- Good in repeatability and reconnect ability.
- Distribution Panel
- Loaded with adapter and included dust cap.
- Adapter type female to female.
- Nylon rivet allow for fast, easy, tool-free installation.
- Meets standard ANSI/TIA-568.3-E, ANSI/TIA-568.3-D, EIA/TIA-604 and ISO/IEC 11801:2017
- RoHS Compliant





## SPECIFICATION

### SC ADAPTER SNAP PLATE

<b>Plate</b>	<b>SINGLEMODE</b> Aluminum
<b>Housing</b>	Black Anodize, Color PBT, UL 94V-0 Green Color, APC
<b>Alignment Sleeve</b>	Ceramic
<b>Dust Cap</b>	PP Black Color
<b>Snap on</b>	Nylon rivet, 2 each

### PERFORMANCE

<b>Insertion Loss</b>	<b>SINGLEMODE</b>
<b>Typical</b>	≤ 0.15 dB
<b>Maximum</b>	≤ 0.30 dB
<b>Durability</b>	500 cycles
<b>Operating Temperature</b>	-40°C to 85°C
<b>Storage Temperature</b>	-40°C to 85°C

## ORDER INFORMATION

### 12 FIBER ADAPTER SNAP PLATE

Part Number	Description	Type	No. of Fiber Port
UF-2255SM-APC	12 SC SIMPLEX ADAPTER SNAP PLATE	SINGLEMODE	12

Specifications subject to change without notice.

© 2026 LINK CORP. ALL RIGHTS RESERVED

www.linkcable.com

UF-2255SM-APC-V1.2\_\_160326